

Product: AGALINE LED 16000 ODB EDD 34 840 / L-2245MM**Index:** 19.4212.4223.34

Description

Agaline is an industrial modular system for installing in straight lines. Agaline is an excellent option for lighting industrial premises and warehouses, but is also suitable for offices, supermarkets and commercial spaces. A luminaire mounted in line systems, made of sheet steel, painted in white. Individual elements of the system combined with connectors. Through-cabing ensures easy and fast installation. To be applied in industrial objects and other places, where high intensity and uniformity of lighting is necessary. ATTENTION: Lenght 2805mm for special request.

Product information


Category	Industrial luminaires
Family	AGALINE LED
Name	AGALINE LED 16000 ODB EDD 34 840 / L-2245MM
Index	19.4212.4223.34
EAN	5902107427801



Light and electrical data


Light source	LED
Luminous flux LED [lm]	17396
LED power [W]	82,4
Luminaire luminous flux [lm]	16700,2
Power of luminaire [W]	92,3
Luminaire's light efficiency [lm/W]	180,9
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 116,4° / 114,4°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 35
Driver	DIM DALI (EDD)

Mechanical data




Assembly	surface mounted on slings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	none
Impact resistant	IK04
Dimensions [mm]	2245 x 162 x 75

A graph of light

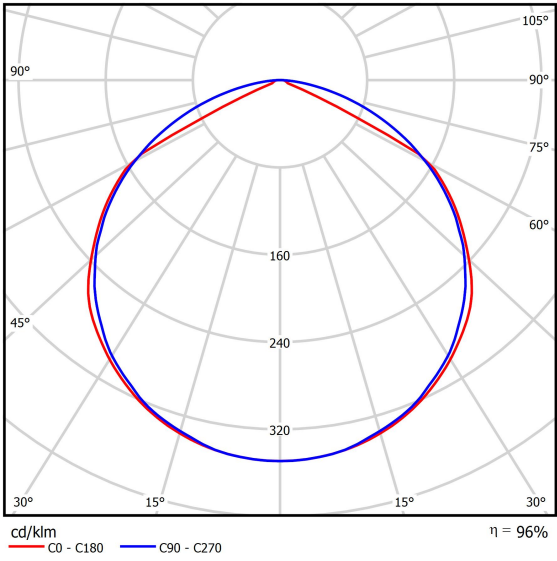


Accessories

Index	0E1ALLS-SP
Name	AGALINE LED CONNECTOR




Index	0E1ALLS-AE
Name	AGALINE LED END-CAP PLX/MICRO-PRM/MICRO- LINE/ODB 34




Index	1E1AL8030-4-2
Name	COVER 8030-4-2 RAL9016



Index	0E1ALLS-SPM
Name	AGALINE LED Connecting points cover ODB 34




Index	6E1-500KW34K-5
Name	SUSPENSION NEW TYPE-A+B 34 LENGHT 1,5M WIRE 5X SET




Index	6E1-8670-B-1,5-5X
Name	SUSPENSION NEW TYPE-F LENGHT-1,5 METER WIRE 5X 1- POINT




Index	19.3272.1205.00
Name	SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index	6E1-500KWB34K-5
Name	SUSPENSION NEW TYPE-A+E 34 LENGHT 1,5M WIRE 5X SET



Index	6E1-9875-4-1,5-5X
Name	SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1- POINT



Index	6E1-9875-3-1,5
Name	SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT

