



## RUBIN LOOK LED IP44

Surface mounted luminaires



Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms. Dust, and humidity penetration: IP44.




"Czarno na białym" hotel, Cracow



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN LOOK LED 1950	1895 / 1964	11,1	3000 / 4000	400 x 400 x 61
RUBIN LOOK LED 2600	2525 / 2617	14,4	3000 / 4000	400 x 400 x 61 / 620 x 325 x 61
RUBIN LOOK LED 3300	3316 / 3436	19,2	3000 / 4000	400 x 400 x 61
RUBIN LOOK LED 3900	3788 / 3926	21,7	3000 / 4000	620 x 625 x 61
RUBIN LOOK LED 4400	4406 / 4565	24,7	3000 / 4000	400 x 400 x 61 / 620 x 325 x 61
RUBIN LOOK LED 5200	5051 / 5234	28,2	3000 / 4000	1220 x 325 x 61 / 620 x 625 x 61
RUBIN LOOK LED 6600	6608 / 6848	35,3	3000 / 4000	620 x 625 x 61
RUBIN LOOK LED 8800	8811 / 9130	49,1	3000 / 4000	1220 x 325 x 61 / 620 x 625 x 61

## Technical drawing:

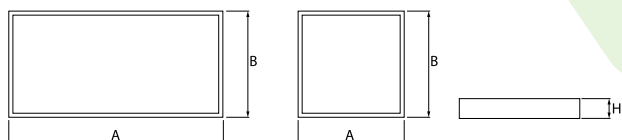

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

\* Variant to specify when ordering

## Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PLX (PMMA opal)

## Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 23-12-2022

**Dodatkowe informacje / Additional information / Zusätzliche Informationen:**

Diody LED Standard vs LED Smooth / Standard LED vs Smooth LED modules / Standard LED vs Smooth LED Module



STANDARD



SMOOTH

**UWAGA / NOTE / ACHTUNG**

W oprawkach typu SMOOTH\* z przesłoną półprzezroczystą tj. MICRO-PRM + SH; MICRO-PRM, SHM pojawia się "efekt cienia" widoczny na zdjęciu.  
\*dotyczy tylko wymiarów 1200x300 i 1200x600 (+/- 5 cm)

In SMOOTH \* luminaires with a semi-transparent diffuser MICRO-PRM + SH; MICRO-PRM, SHM appears "shadow effect" visible in the picture below.  
\* only for dimensions 1200x300 and 1200x600 (+/- 5 cm)

In SMOOTH \* -Leuchten mit einem halbtransparenten Diffusor MICRO-PRM + SH; MICRO-PRM, SHM erscheint als „Schatteneffekt“ im Bild unten sichtbar.  
\* nur für Abmessungen 1200x300 und 1200x600 (+/- 5 cm)

