

**Product:** AGAT CLEAN NO FRAME LED CRI95 10800 MICRO-PRM SH E IP65 940 / 1200X600

**Index:** 19.3199.0010.34



## Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Luminary designed to module and gypsum and cardboard suspended ceilings, equipped with highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Its characteristic feature is lack of aluminum frame what allows to exclude the unwished-for contamination in clean rooms. There are no visible elements joining the diffuser and the luminary body.

## Product information


Category	Clean luminaires CRI95
Family	AGAT CLEAN NO FRAME LED CRI95
Name	AGAT CLEAN NO FRAME LED CRI95 10800 MICRO-PRM SH E IP65 940 / 1200X600
Index	19.3199.0010.34



## Light and electrical data

Light source	LED
Luminous flux LED [lm]	11750
LED power [W]	72
Luminaire luminous flux [lm]	8459
Power of luminaire [W]	73,5
Luminaire's light efficiency [lm/W]	115,1
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 88° / 91,8°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	9 (B10), 15 (B16), 15 (C10), 24 (C16)

## Mechanical data

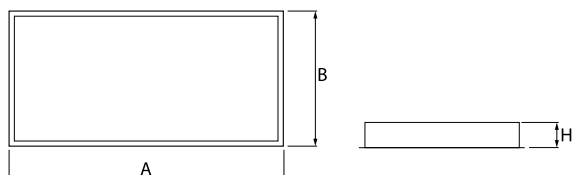

Assembly	mounted in module ceilings
Material	steel sheet
Color	white
Diffuser	Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass)
Impact resistant	IK08
Weight [kg]	14,5
Dimensions [mm]	1196 x 596 x 67
Mounting hole [mm]	1180 x 580

## A graph of light

