

А

Product: ARTSHAPE THREE LED MEDIUM FULL UP&DOWN 4000/11000 PLX E 34 840 / S-1,5M Index: 19.4021.5421.34




Description

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on slings. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palete, the luminaries allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Direct-indirect light distribution.

Product information	Category Architectural luminaires		
	Family ARTSHAPE THREE L		
	,	ED MEDIUM FULL UP&DOWN 4000/11000	
	PLX E 34 840 / S-1,5N		
	Index 19.4021.5421.34		
Light and electrical data	Light source	LED	
	Luminous flux LED [lm]	4104/10894	
	LED power [W]	31/80	
	Luminaire luminous flux [lm]	11653	
	Power of luminaire [W]	122	
	Luminaire's light efficiency [lm/W	95,5	
	Color of the light [K]	4000	
	CRI	>80	
	SDCM (LED sources)	4	
	Beam angle [°]	(C0-C180) / (C90-C270) - 111,2° / 114,2°	
	Protection against electric shock	I	
	Protection degree	IP20	
	Voltage	220240 V, 5060 Hz	
	Lifetime of LED sources [h]	35000	
	Lx/By	L80/B10	
	Operating temperature range [°C	c] 0 ÷ 30	
	Driver	standard on/off (E)	
	Power factor $\cos \phi$	>0,95	
	Circuit load capacity	5 (B10), 7 (B16), 8 (C10), 12 (C16)	
Mechanical data	Assembly	surface mounted on slings	
	Material	aluminum	
	Color	RAL 9016 (white)	
	Diffuser	PLX (PMMA opal)	
	Impact resistant	IK04	
	1		

A graph of light

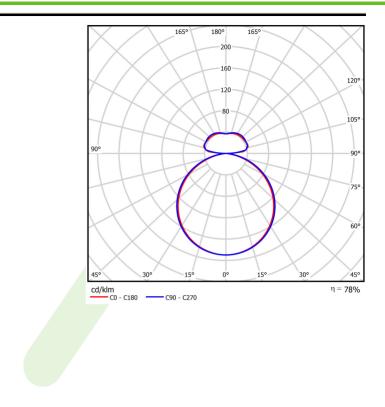



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 23-12-2022