

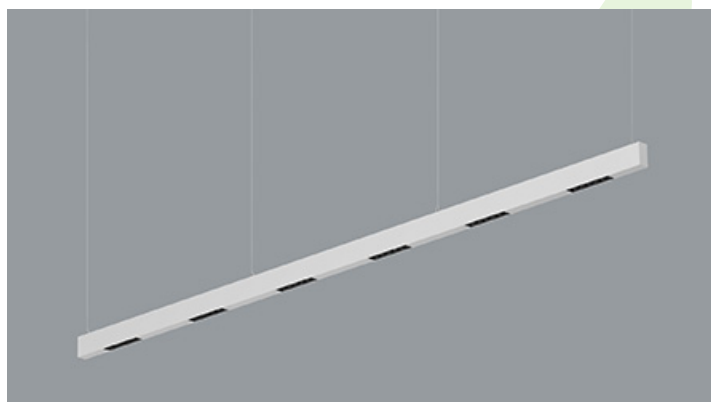


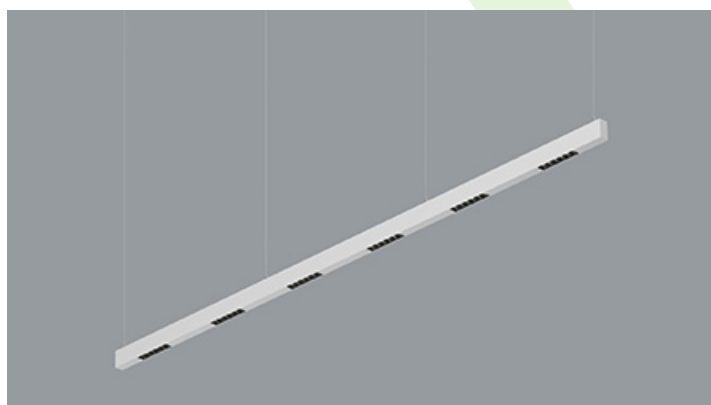

X-LINE SLIGHT LOW UGR LED LINE

Surface mounted luminaires

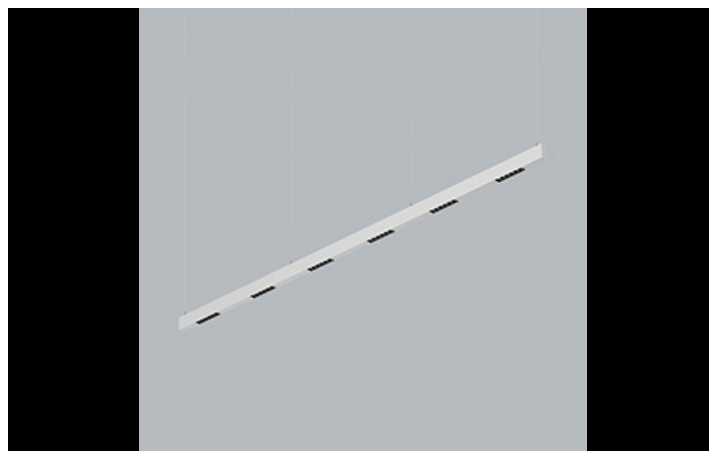



Linear luminaire with minimized width. Made of 34 mm wide and 68 mm high aluminum profile. Mounted on slings. Direct light distribution. The optical system is fulfilled by an anti-glare raster with symmetrical lenses of 45° distribution. Luminaire in system version. Available colours: anodized aluminum, black (RAL 9005), grey (RAL 9006), white (RAL 9016) or any RAL colour on request. End cap aluminum, painted in the colour of the body. Application of luminaires typically for office spaces.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
X-LINE SLIGHT LOW UGR L-DOWN LED 1200 LINE-BM	1181 / 1243,2	8	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 1200 LINE-S	1181 / 1243,2	8	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 1800 LINE-BM	1771,5 / 1864,5	11,3	3000 / 4000	1198 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 1800 LINE-S	1771,5 / 1864,5	11,3	3000 / 4000	1196 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 2000 LINE-BM	1921,2 / 2022,3	13,2	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 2000 LINE-S	1921,2 / 2022,3	13,2	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 2400 LINE-BM	2362 / 2486	14,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 2400 LINE-S	2362 / 2486	14,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 3000 LINE-BM	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1198 x 34 x 68 / 1998 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 3000 LINE-S	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1196 x 34 x 68 / 1996 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 4000 LINE-BM	3842 / 4044	25,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 4000 LINE-S	3842 / 4044	25,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 5000 LINE-BM	4802,5 / 5055	31,8	3000 / 4000	1998 x 34 x 68
X-LINE SLIGHT LOW UGR L-DOWN LED 5000 LINE-S	4802,5 / 5055	31,8	3000 / 4000	1996 x 34 x 68
X-LINE SLIGHT LOW UGR LED 1200 LINE-BM	1181 / 1243,2	8	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT LOW UGR LED 1200 LINE-S	1181 / 1243,2	8	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT LOW UGR LED 1800 LINE-BM	1771,5 / 1864,5	11,3	3000 / 4000	1198 x 34 x 68
X-LINE SLIGHT LOW UGR LED 1800 LINE-S	1771,5 / 1864,5	11,3	3000 / 4000	1196 x 34 x 68
X-LINE SLIGHT LOW UGR LED 2000 LINE-BM	1921,2 / 2022,3	13,2	3000 / 4000	798 x 34 x 68
X-LINE SLIGHT LOW UGR LED 2000 LINE-S	1921,2 / 2022,3	13,2	3000 / 4000	796 x 34 x 68
X-LINE SLIGHT LOW UGR LED 2400 LINE-BM	2362 / 2486	14,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT LOW UGR LED 2400 LINE-S	2362 / 2486	14,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT LOW UGR LED 3000 LINE-BM	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1198 x 34 x 68 / 1998 x 34 x 68
X-LINE SLIGHT LOW UGR LED 3000 LINE-S	2881,5 / 2952,5 / 3033 / 3107,5	19,1 / 18,2	3000 / 4000	1196 x 34 x 68 / 1996 x 34 x 68
X-LINE SLIGHT LOW UGR LED 4000 LINE-BM	3842 / 4044	25,5	3000 / 4000	1598 x 34 x 68
X-LINE SLIGHT LOW UGR LED 4000 LINE-S	3842 / 4044	25,5	3000 / 4000	1596 x 34 x 68
X-LINE SLIGHT LOW UGR LED 5000 LINE-BM	4802,5 / 5055	31,8	3000 / 4000	1998 x 34 x 68
X-LINE SLIGHT LOW UGR LED 5000 LINE-S	4802,5 / 5055	31,8	3000 / 4000	1996 x 34 x 68

Technical drawing:

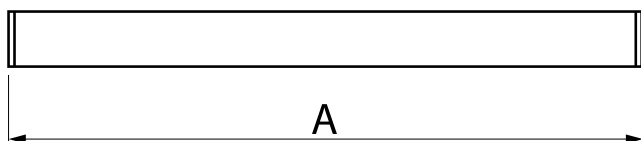

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	145000
Lx/By	L90/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	anodised aluminum RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) *
Diffuser	LOUVER (anti-glare louver)



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-12-2024