

Product: X-LINE PRO COMPACT 8000 PLX EDD 04 830 / L-2254MM

Index: 19.2117.1533.04



Description

Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: PMMA opal diffuser (PLX), microprismatic PMMA (Micro-PRM). The luminaire is available in a single version. Available colors: anodized aluminum, black RAL 9005, white RAL 9016 or any color from the RAL palette on request. Gray, white or black polycarbonate end caps. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover and increase the IP rating to IP40. The use of luminaires typically for offices, public utility rooms, communication / common areas in multi-family buildings.

Product information

| | |
|----------|--|
| Category | Compact |
| Family | X-LINE PRO COMPACT |
| Name | X-LINE PRO COMPACT 8000 PLX EDD 04 830 / L-2254MM |
| Index | 19.2117.1533.04 |



Light and electrical data



| | |
|---|---|
| Light source | LED |
| Luminous flux LED [lm] | 8560 |
| LED power [W] | 44,4 |
| Luminaire luminous flux [lm] | 5230,2 |
| Power of luminaire [W] | 50,5 |
| Luminaire's light efficiency [lm/W] | 103,6 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 103,4° / 104,8° |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Protection against electric shock | I |
| Protection degree | IP40 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 90000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 35 |
| Driver | DIM DALI (EDD) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 14 (B10), 23 (B16), 22 (C10), 35 (C16) |

Mechanical data




| | |
|------------------|---|
| Assembly | directly mounted to ceiling construction or surface mounted on slings using accessories |
| Material | aluminum |
| Color | RAL 9005 (black) |
| Diffuser | PLX (PMMA opal) |
| Impact resistant | IK04 |
| Dimensions [mm] | 2254 x 60 x 72 |

A graph of light

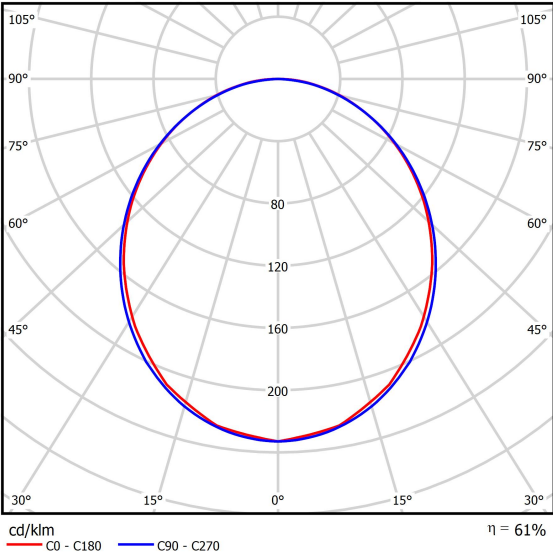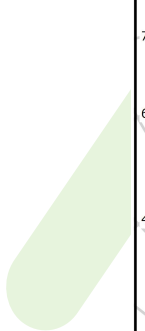


Accessories

| | |
|-------|---|
| Index | 6E1-500KW041P-5 |
| Name | SUSPENSION NEW TYPE-A 04 LENGHT 1,5M WIRE 5X 1-POINT |

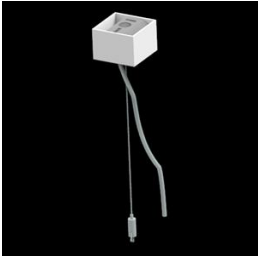

| | |
|-------|---|
| Index | 19.3272.1205.00 |
| Name | SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT |

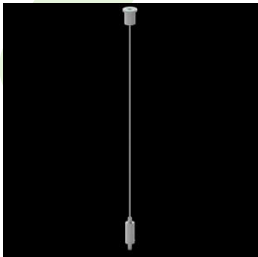

| | |
|-------|---|
| Index | 19.2117.0007.04 |
| Name | X-LINE PRO COMPACT L-DOWN SURFACE BRACKET SET 04 |

