


Product: EUGEN S LED 4400 PLX L-DOWN E 21 830

Index: 19.3017.1008.21

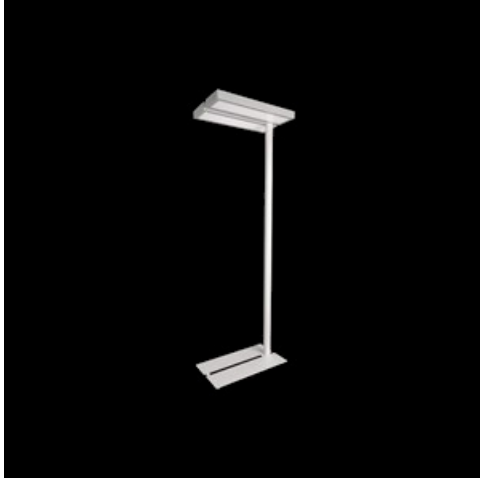

Description

Simple and modern design of this standing luminary makes it a perfect choice for offices, conference and lecture rooms, public buildings, hotels, boarding-houses, restaurants, cinemas, theatres. It gives interiors interesting, individual character. Housing of Eugen is made of aluminium, powder painted.

Product information

Category	Architectural luminaires
Family	EUGEN S LED
Name	EUGEN S LED 4400 PLX L-DOWN E 21 830
Index	19.3017.1008.21
EAN	5901867465702



Light and electrical data

Light source	LED
Luminous flux LED [lm]	4406
LED power [W]	23,4
Luminaire luminous flux [lm]	3135
Power of luminaire [W]	24,7
Luminaire's light efficiency [lm/W]	126,9
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 108,2° / 107,2°
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	30 (B10), 48 (B16), 43 (C10), 70 (C16)

Mechanical data



Assembly	for the ground
Material	aluminum
Color	RAL 9006 (grey, metallic, fine structure)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	630 x 350 x 1904

A graph of light

