


Product: KUBIK CEILING SLIM LED 1X1,7W 24°/4000K E IP65 25

Index: 19.3151.0001.25

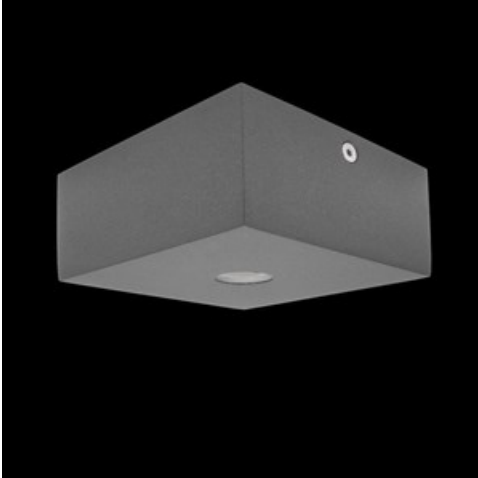

Description

An outdoor fitting designed for ceiling mounting. The body is made of aluminum. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application of the Kubik-type fitting almost in every building. The assembly is very easy. Level of protection against penetration of dust and water - IP65. Kubik Ceiling Slim LED luminaire relative to the standard version has a smaller height. Kubik Ceiling Slim LED is more slim, and thus stands out from the ceiling for only 5 cm.

Product information

| | |
|----------|---|
| Category | Outdoor luminaires |
| Family | KUBIK CEILING SLIM LED |
| Name | KUBIK CEILING SLIM LED 1X1,7W 24°/4000K E IP65 25 |
| Index | 19.3151.0001.25 |
| EAN | 5902107254841 |



Light and electrical data

| | |
|-------------------------------------|---|
| Light source | LED |
| Luminous flux LED [lm] | 152 |
| LED power [W] | 2 |
| Luminaire luminous flux [lm] | 145 |
| Power of luminaire [W] | 3 |
| Luminaire's light efficiency [lm/W] | 48,3 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 36° / 36° |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 50000 |
| Lx/By | L70/B50 |
| Operating temperature range [°C] | -25 ÷ 30 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,5 |
| Circuit load capacity | 80 (B10), 157 (B16), 265 (C10), 317 (C16) |

Mechanical data



| | |
|------------------|---|
| Assembly | surface mounted on ceiling |
| Material | aluminum |
| Color | RAL 7016 (anthracite, metallic, fine structure) |
| Diffuser | transparent polycarbonate |
| Impact resistant | IK09 |
| Dimensions [mm] | 100 x 100 x 50 |

A graph of light

