

Product: RUBIN CLEAN LED CRI95 7200 MICRO-PRM SH E IP65 940 / 1210X310

Index: 19.3220.0011.34



Description

Luxiona Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminaire recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Surface mounted luminaire equipped in highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Diffusers and optical systems in aluminum frame.

Product information


Category	Clean luminaires CRI95
Family	RUBIN CLEAN LED CRI95
Name	RUBIN CLEAN LED CRI95 7200 MICRO-PRM SH E IP65 940 / 1210X310
Index	19.3220.0011.34



Light and electrical data

Light source	LED
Luminous flux LED [lm]	7833
LED power [W]	50
Luminaire luminous flux [lm]	5639
Power of luminaire [W]	52
Luminaire's light efficiency [lm/W]	108
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 88° / 91,8°
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

Mechanical data

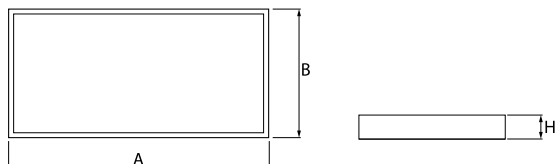

Assembly	surface mounted on ceiling
Material	steel sheet
Color	white
Diffuser	Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass)
Impact resistant	IK08
Weight [kg]	8,49
Dimensions [mm]	1210 x 310 x 78

A graph of light



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 20-09-2021