

Product: ARTSHAPE LINE WALL L-1150 UP&DOWN 2600/2600 PLX EDD 25 840**Index:** 19.4049.4423.25

Description

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the wall. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaries allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Direct-indirect light distribution.

Product information

Category	Architectural luminaires
Family	ARTSHAPE LINE WALL
Name	ARTSHAPE LINE WALL L-1150 UP&DOWN 2600/2600 PLX EDD 25 840
Index	19.4049.4423.25
EAN	5902107238254



Light and electrical data


Light source	LED
Luminous flux LED [lm]	5680
LED power [W]	30
Luminaire luminous flux [lm]	2978
Power of luminaire [W]	34
Luminaire's light efficiency [lm/W]	87,6
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 113,4° / 111,8°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	0 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)

Mechanical data



Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	1150 x 110 x 85

A graph of light

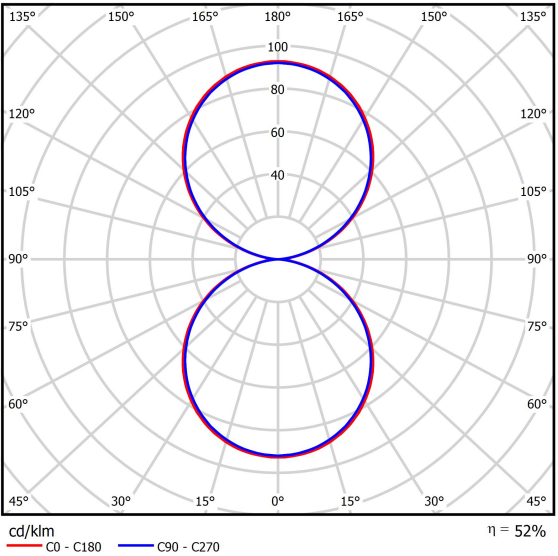

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 22-08-2025