

**Product:** AGAT CLEAN-ECO LED CRI95 5400 MICRO-PRM EDD IP65 34 940 / 600X600

**Index:** 19.4072.1143.34



## Description

LUXIONA Poland as the only company in Europe has obtained CRI>95 for its luminaires (it provides high level of R9 and R13 that faithfully render the color of blood and tissue). Luminary recommended for operating theatres - lighting that is applied should faithfully render the color of blood, tissue, and skin (R9 responsible for rendering „deep red” color, and R13 responsible for rendering „light orange” color). Luminary designed to module suspended ceilings, equipped with the highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.

## Product information

Category	Clean luminaires CRI95
Family	AGAT CLEAN-ECO LED CRI95
Name	AGAT CLEAN-ECO LED CRI95 5400 MICRO-PRM EDD IP65 34 940 / 600X600
Index	19.4072.1143.34
EAN	5902107262709



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	6213
LED power [W]	36,3
Luminaire luminous flux [lm]	5101
Power of luminaire [W]	40,7
Luminaire's light efficiency [lm/W]	125,3
Color of the light [K]	4000
CRI	>95
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 89° / 89°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP65
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	14 (B10), 23 (B16), 22 (C10), 35 (C16)

Mechanical data



Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)
Impact resistant	IK04
Weight [kg]	6
Dimensions [mm]	596 x 596 x 75

A graph of light

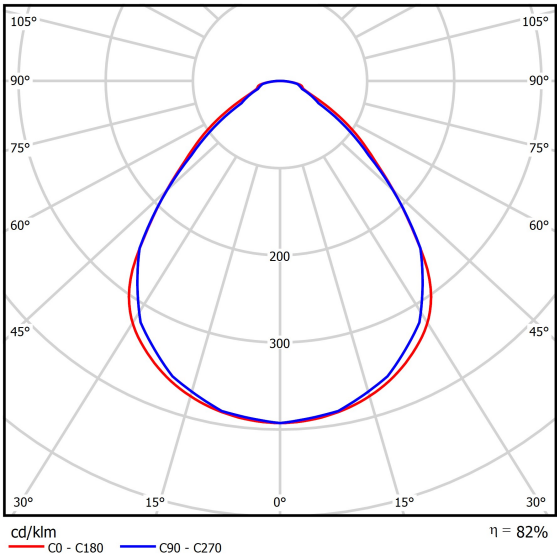

Accessories

Index	2C1A7392
Name	Adaptive frame for plasterboard ceiling (600x600)

