Product: X-LINE LED 2600 PLX E 24 830 / L-1132MM
Index: 19.4159.2111.24

Description

Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information

Category	**Surface mounted luminaires**
Family	**X-LINE LED**
Name	**X-LINE LED 2600 PLX E 24 830 / L-1132MM**
Index	**19.4159.2111.24**

Light and electrical data

Light source	**LED**
Luminous flux LED [lm]	**2525**
LED power [W]	**13,3**
Luminaire luminous flux [lm]	**1683**
Power of luminaire [W]	**14,4**
Luminaire's light efficiency [lm/W]	**116,9**
Color of the light [K]	**3000**
CRI	**>80**
SDCM (LED sources)	**3**
Beam angle [°]	**(C0-C180) / (C90-C270) - 109° / 107,2°**
Photobiological risk class (IEC/EN 62471)	**RG0**
Protection against electric shock	**I**
Protection degree	**IP44**
Voltage	**220..240 V, 50..60 Hz**
Lifetime of LED sources [h]	**100000 (1) / 147000 (2)**
Lx/By	**L80/B10 (1) / L70/B50 (2)**
Operating temperature range [°C]	**5 ÷ 30**
Driver	**standard on/off (E)**
Power factor cos φ	**>0,95**
Circuit load capacity	**46 (B10), 74 (B16), 72 (C10), 115 (C16)**

Mechanical data



Assembly	**directly mounted to ceiling construction or surface mounted on slings using accessories**
Material	**aluminum**
Color	**anodised aluminum**
Diffuser	**PLX (PMMA opal)**
Impact resistant	**IK04**
Weight [kg]	**2,7**
Dimensions [mm]	**1132 x 63 x 74**

A graph of light

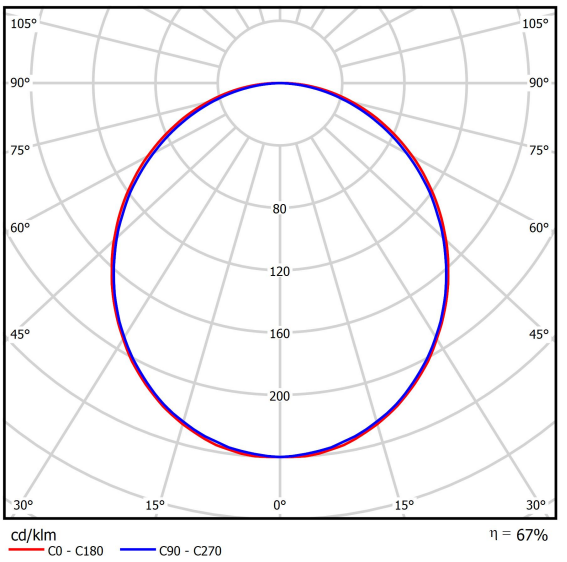

Accessories

Index	6E1-500KWANK-3
Name	SUSPENSION NEW TYPE-A+B 24 LENGHT 1,5M WIRE 3X SET



Index	6E1-8670-B-1,5-3X
Name	SUSPENSION NEW TYPE-F LENGHT-1,5 METER WIRE 3X 1-POINT

Index	19.3272.1205.00
Name	SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT

Index	6E1-500KWB24K-3
Name	SUSPENSION NEW TYPE-A+E 24 LENGHT 1,5M WIRE 3X SET



Index	6E1-9875-4-1,5-3X
Name	SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT



Index	6E1-9875-3-1,5
Name	SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT