



## KUBIK WALL LONG LED UP OR DOWN

### Outdoor luminaires




A luminaire made for illuminating building facades. The body is made of aluminum painted with special facade paint which is resistant to bad weather conditions. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application almost in every building. The assembly is very easy. The fitting is featured by a high level of protection against the penetration of solids and water IP65.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK WALL LONG LED UP OR DOWN 650	710	4	4000	324 x 125 x 100
KUBIK WALL LONG LED UP OR DOWN 1100	1161	7	4000	324 x 125 x 100
KUBIK WALL LONG LED UP OR DOWN 1300	1420	9	4000	604 x 125 x 100
KUBIK WALL LONG LED UP OR DOWN 2200	2283	12,6	4000	604 x 125 x 100

Technical drawing:

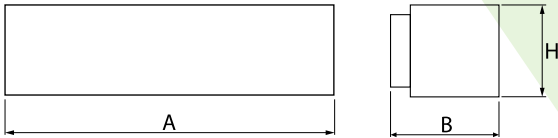

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

\* Variant to specify when ordering

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 9005 (black) RAL 9006 (gray, metallic, fine structure) RAL 9016 (white) *
Diffuser	PMMA opal

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-01-2023