

## Product: ONLINE LED 2600 PLX E 24 830 / L-572MM Index: 19.3090.0001.24



## Description


Luminary to be mounted on suspensions , or directly on solid ceiling construction. The suspended version is equipped with 1500 mm long suspension system that includes smooth regulation of the suspension length. Its body made from anodized aluminum profile. Luminary is equipped with highly efficient LED sources. Its diffuser is made from white polymethyl methacrylate with a light transparency more than 70%. Optical system creates Lambert diffuse reflection. No frame diffuser is equipped with specially formed latches that match the aluminum profile. Luminary is resistant to solids, dust, and humidity penetration – IP20.

Product information	Category	Category Surface mounted luminaires Family ONLINE LED	
	Family		
	Name	ONLINE LED 2600	PLX E 24 830 / L-572MM
	Index	19.3090.0001.24	
Light and electrical data	Light source		LED
	Luminous flu	x LED [lm]	2525
	LED power [	W]	13,3
	Luminaire lu	minous flux [lm]	1992
	Power of lum	ninaire [W]	14,4
	Luminaire's I	ight efficiency [lm/W]	138,3
	Color of the	light [K]	3000
	CRI		>80
	SDCM (LED	sources)	3
	Beam angle	[°]	(C0-C180) / (C90-C270) - 93,8° / 96,6°
	Protection aç	gainst electric shock	I
	Protection de	egree	IP20
	Voltage		220240 V, 5060 Hz
	Lifetime of L	ED sources [h]	100000 (1) / 147000 (2)
	Lx/By		L80/B10 (1) / L70/B50 (2)
	Operating te	mperature range [°C]	5 ÷ 30
	Driver		standard on/off (E)
	Power factor	cos φ	>0,95
	Circuit load o	apacity	46 (B10), 74 (B16), 72 (C10), 115 (C16)
Mechanical data	Assembly	direc surfa	ctly mounted to ceiling construction or ace mounted on slings
	Material	alum	ninum
	Color	anoc	lised aluminum
	Diffuser	PLX	(PMMA opal)
	Impact resist	ant <b>IK04</b>	

Dimensions [mm]

572 x 92 x 86

## A graph of light

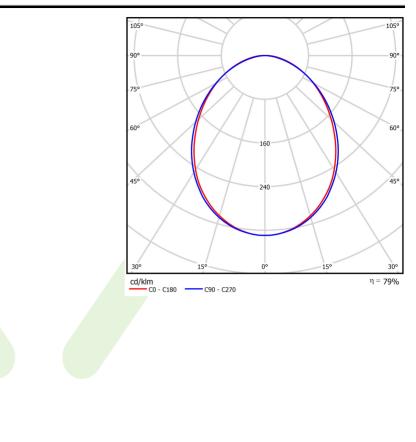






## Accessories

- Index 6E1-500KWANK-3
- Name SUSPENSION NEW TYPE-A+B 24 LENGHT 1,5M WIRE 3X SET



- Index 6E1-9875-4-1,5-3X
- Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 3X 1-POINT








Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT



- Index 6E1-8670-B-1,5
- Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



- Index 6E1-500KWB24K-3
- Name SUSPENSION NEW TYPE-A+E 24 LENGHT 1,5M WIRE 3X SET

