

Product: BERYL NEW LED K-2/S4 3600 PLX EDD 04 IP20/44 840

Index: 19.4033.6223.04



Description

Aluminum cast housing. This technology significantly increases possibility of application of particular luminaire due to lower ceiling load since additional cooling radiator is not required. Beryl New LED K has higher efficiency and efficiency than the previous version. Luminaire is dedicated for prestigious interiors such as hotels, banks and offices of higher standard. Owing to the newest components and renowned producers of LEDs applied it was possible to build such luminaires which save energy consumption comparing with traditional solutions. The luminaire has the ability to adjust the optics in two planes (in the vertical axis by 359° and to the left and right 15°). Note: the color of the frame and housing has a slightly different shade than the color of the inner reflector cover.

Product information


Category	Recessed luminaires
Family	BERYL NEW LED K/S4
Name	BERYL NEW LED K-2/S4 3600 PLX EDD 04 IP20/44 840
Index	19.4033.6223.04



Light and electrical data


Light source	LED
Luminous flux LED [lm]	17220
LED power [W]	90
Luminaire luminous flux [lm]	10363
Power of luminaire [W]	102
Luminaire's light efficiency [lm/W]	101,6
Color of the light [K]	4000
CRI	80
SDCM (LED sources)	2
Beam angle [°]	(C0-C180) / (C90-C270) - 75,8° / 75,6°
Protection against electric shock	I
Protection degree	IP20/44
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	86000 (1) / 100000 (2) / 100000 (3)
Lx/By	L90/B10 (1) / L80/B10 (2) / L70/B10 (3)
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	6 (B10), 10 (B16), 10 (C10), 16 (C16)

Mechanical data

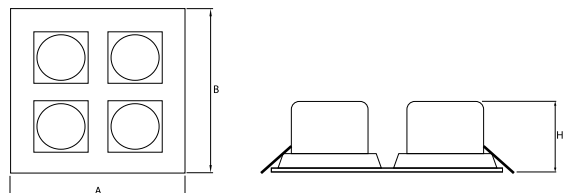

Assembly	mounted in module ceilings, as well as plasterboard ceilings
Material	aluminum
Color	RAL 9005 (black)
Diffuser	PLX (PMMA opal)
Impact resistant	IK04
Dimensions [mm]	326 x 326 x 135
Mounting hole [mm]	315 x 315

A graph of light

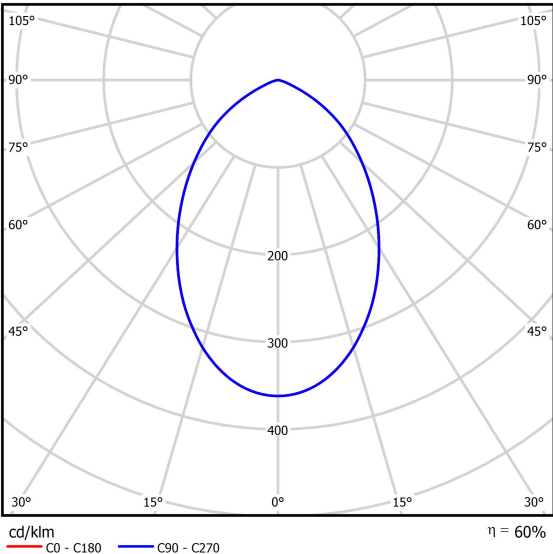

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
 Technical data may be changed. Photos of the luminaires may differ from reality.
 Date of last update: 24-01-2023