

Product: X-LINE SLIM L-DOWN LED 5500 OPTICS-ASYM EDD 24 840 / L-1425MM S-1,5M Index: 19.4090.4723.24




Description

The luminaire is made of aluminum profile. There is only lower half-space light distribution (L-DOWN). Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser or lenses. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on suspensions.

Product information	Category Surface mounted luminaires		
	Family		
	Name	X-LINE SLIM L-DOWN 1425MM S-1,5M	LED 5500 OPTICS-ASYM EDD 24 840 / L-
	Index	19.4090.4723.24	
			P (E) (P_{40}) (K_{4}) (P_{40}) (K_{4})
Light and electrical data	Light sou	irce	LED
	Luminou	s flux LED [lm]	5727
	LED pow	ver [W]	29
	Luminair	e luminous flux [lm]	4525
	Power of	luminaire [W]	30,5
	Luminair	e's light efficiency [lm/W]	148,4
	Color of	the light [K]	4000
	CRI		>80
	SDCM (L	ED sources)	3
	Beam an	igle [°]	asymmetric light distribution - Imax=-20°
	Protection against electric shock		1
	Protection degree		IP40
	Voltage		220240 V, 5060 Hz
	Lifetime	of LED sources [h]	100000 (1) / 147000 (2)
	Lx/By		L80/B10 (1) / L70/B10 (2)
	Operatin	g temperature range [°C	5 ÷ 30
	Driver		DIM DALI (EDD)
	Power fa	ctor cos φ	>0,95
	Circuit lo	ad capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)
Mechanical data	Assembly	y s	urface mounted on slings
	Material	а	luminum
	Color an		nodised aluminum
	Diffuser	C	OPTICS (optical system based on lenses)
	Impact re	esistant I	K04
	Dimensio	ons [mm] 1	425 x 48 x 70

A graph of light

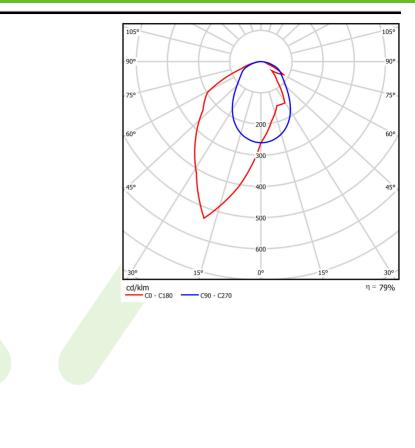





Accessories

- Index 6E1-500KWANK-5
- Name SUSPENSION NEW TYPE-A+B 24 LENGHT 1,5M WIRE 5X SET




- Index 6E1-9875-4-1,5-5X
- Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT




Index 6E1-8670-B-1,5-5X
Name SUSPENSION NEW TYPE-F
LENGHT-1,5 METER WIRE 5X 1POINT



Index 6E1-9875-3-1,5 Name SUSPENSION NEW TYPE-C LENGHT-1,5 METER WITHOUT WIRE 1-POINT



- Index 6E1-8670-B-1,5
- Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-500KWB24K-5

Name SUSPENSION NEW TYPE-A+E 24 LENGHT 1,5M WIRE 5X SET

