

Product: X-LINE LED 3300 PLX EDD 24 840 LINE-1S / CONNECTOR TYPE-LD 600/300 Index: 19.4176.5223.24



Description


Light fitting made out of aluminium profile equipped with opal diffuser or MPRM and driver.X-LINE fittings are intended to be mounted on ceiling or pendants. The luminaries are adjusted to be linked together with specially designed links, which provide great freedom in arranging elements of the system as well as great functionality. In the family of X-LINE LED fittings modules of renowned brands are applied.

Product information	Category Surface mounted luminaires		
	Family X-LINE LED CONNECTOR L		
		40 LINE-1S / CONNECTOR TYPE-	
	Name X-LINE LED 3300 PLX EDD 24 8 LD 600/300	40 LINE-13 / CONNECTOR TIPE-	
	Index 19.4176.5223.24		
Light and electrical data	Light source LED		
	Luminous flux LED [Im]3436		
	LED power [W] 17,4		
	Luminaire luminous flux [lm] 2290		
	Power of luminaire [W] 19,2		
	Luminaire's light efficiency [lm/W] 119,3		
	Color of the light [K] 4000		
	CRI >80		
	SDCM (LED sources) 3		
	Beam angle [°] (C0-C	:180) / (C90-C270) - 109° / 107,2°	
	Protection against electric shock	Protection against electric shock	
	Protection degree IP44		
	Voltage 220 2	240 V, 5060 Hz	
	Lifetime of LED sources [h] 10000	00 (1) / 147000 (2)	
	Lx/By L80/E	310 (1) / L70/B50 (2)	
	Operating temperature range [°C] 5 ÷ 30)	
	Driver DIM C	DALI (EDD)	
	Power factor $\cos \varphi$ >0,95		
	Circuit load capacity 17 (B	10), 28 (B16), 26 (C10), 41 (C16)	
Mechanical data	Assembly directly mound surface mound surfac	y directly mounted to ceiling construction or surface mounted on slings	
A ►	Material aluminum	aluminum	
	Color anodised alu	anodised aluminum	
	Diffuser PLX (PMMA of	PLX (PMMA opal)	
	Impact resistant IK04		

Dimensions [mm]

593 x 313 x 71

A graph of light

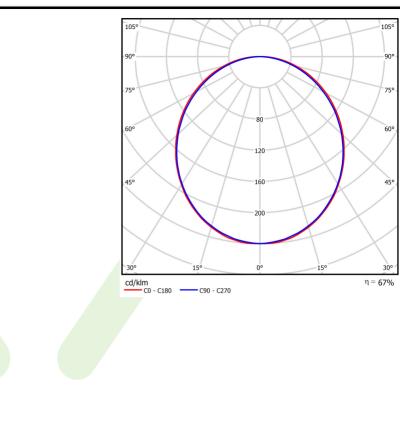






Accessories










Index 6E1-500KWAN1P-B Name SUSPENSION NEW TYPE-B 24 LENGHT 1,5M WITHOUT WIRE 1-POINT



Name X-LINE Clamp for line luminaires




Index 6E1-8670-B-1,5

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT



Index 6E1-9875-4-1,5-5X

Name SUSPENSION NEW TYPE-D LENGHT-1,5 METER WIRE 5X 1-POINT





Luminous flux tolerance +/- 10%. Power tolerance +/- 10%. Technical data may be changed. Photos of the luminaires may differ from reality. Date of last update: 24-01-2023