

**Product:** X-LINE SLIM SURFACE LED 4400 OPTICS-WIDE EDD 24 827-865 / L-1144MM TUNABLE WHITE  
**Index:** 19.4184.1253.24



Description

The luminaire is made of aluminum profile. Comparing to the traditional X-Line LED, size of the luminaire has been reduced, and all construction has been closed in a narrow 48 mm profile, which gives now a more elegant form of the product. The X-Line Slim uses a PLX or Micro-PRM opal diffuser or lenses. All of this allows to manipulate light and create lighting systems, facilitating the creation of comfortable vision in the interiors and their aesthetic appearance. The X-Line Slim luminaire is designed for mounting on ceiling. The luminaire is equipped with LED modules adjusted to regulate the color temperature of light in the range from 2700 K to 6500 K.

Product information


Category	Surface mounted luminaires
Family	X-LINE SLIM SURFACE LED
Name	X-LINE SLIM SURFACE LED 4400 OPTICS-WIDE EDD 24 827-865 / L-1144MM TUNABLE WHITE
Index	19.4184.1253.24



Light and electrical data


Light source	LED
Luminous flux LED [lm]	4304÷4574 (2700÷6500 K)
LED power [W]	27÷29 (6500÷2700 K)
Luminaire luminous flux [lm]	3591÷3817 (2700÷6500 K)
Power of luminaire [W]	32
Luminaire's light efficiency [lm/W]	112÷119 (2700÷6500 K)
Color of the light [K]	2700 ÷ 6500
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 101,8° / 88,4°
Protection against electric shock	I
Protection degree	IP40
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	50000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 42 (C16)

Mechanical data



Assembly	surface mounted on ceiling
Material	aluminum
Color	anodised aluminum
Diffuser	OPTICS (optical system based on lenses)
Impact resistant	IK04
Dimensions [mm]	1144 x 48 x 70

## A graph of light

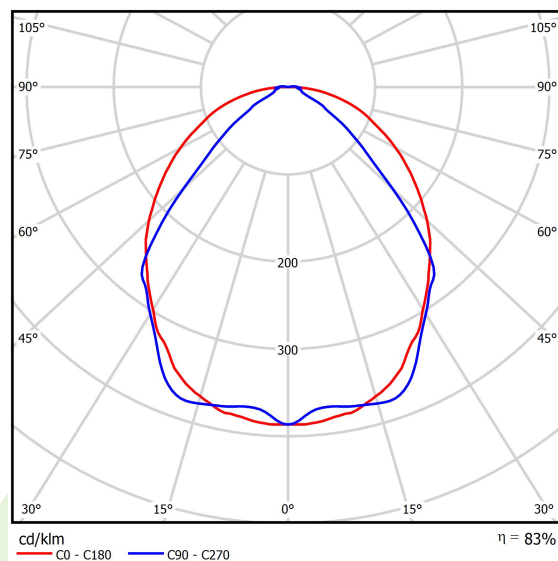

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-01-2023